


PAW Nozzles

► Features

- High flow rate yet relatively small droplets size.
- Large orifice diameter.
- Wide-angle full-cone spray pattern



► Applications

- Waste water atomizing in incinerator
- Waste oil burning
- Oil burner
- Cooling of gases

► Material

- Standard material: SUS316 (principal parts)


► Model

Connecting threads	1/2", 3/4"
Flow rate	5.1 □ 10 L/min (at 0.03MPa)
Spray angle	-

Performance Data


Air-water volume ratio vs. particle size graph

Nozzle model number PAW60S

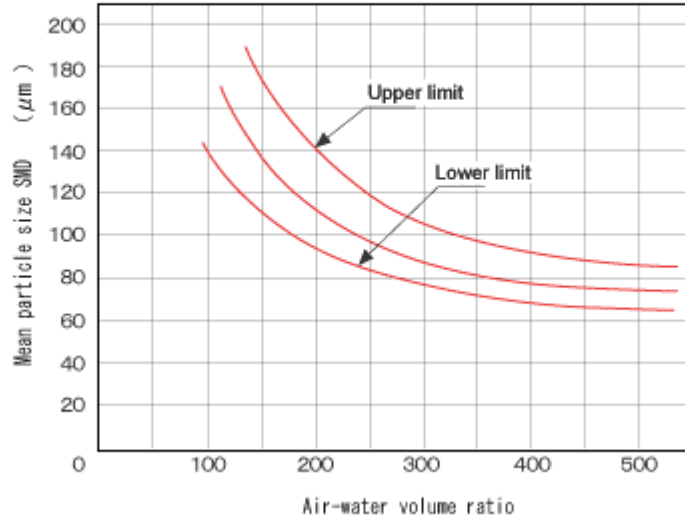


Water pressure vs. water flow rate graph

Nozzle model number PAW 60S

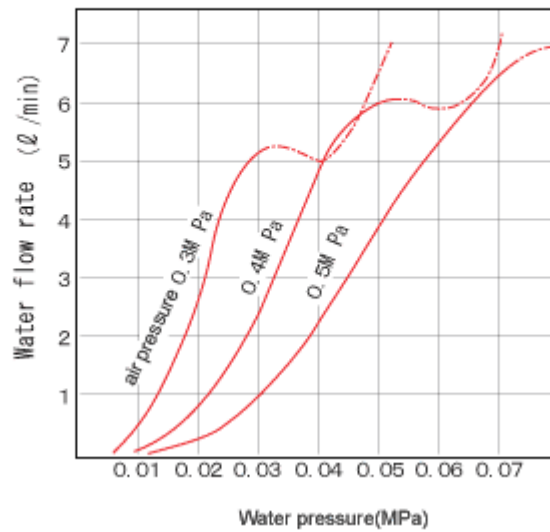


Shapes and dimensions

PAW 60S Type

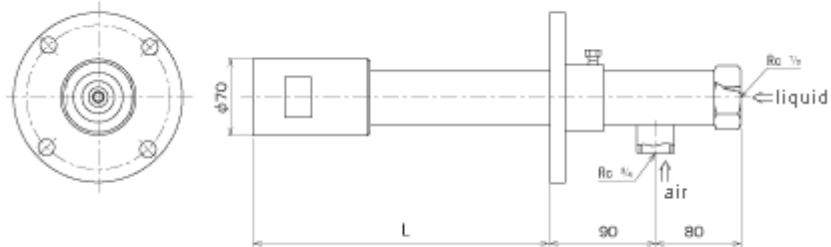

NPT thread is also available.

PAW-B-S Type

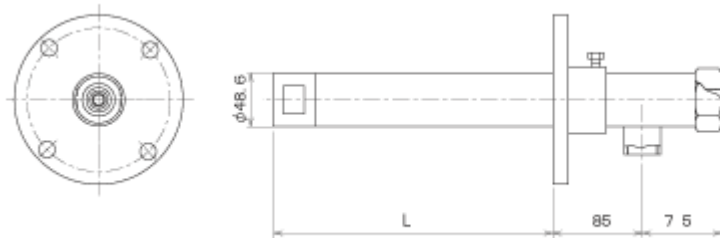

NPT thread is also available.

Model and Model Number representing

PAW

60S
|
Model number

