

## KAM Nozzles (to Cool Gases) Wide-angle Mist Series

---

### ► Features

- Spray angle capacity: 40° to 80°.
  - Wide-area cooling.
- .....



### ► Applications

- Exhaust gas cooling in refuse incineration plants and de-superheating tower.
- .....

### ► Material


- Standard material: SUS316L (principal parts)
- .....

### ► Model

Connecting threads	1/2"
Flow rate	400 □ 1140 L/h (at 0.3MPa)
Spray angle	40° □ 80°

## Shapes and dimensions

### Straight type

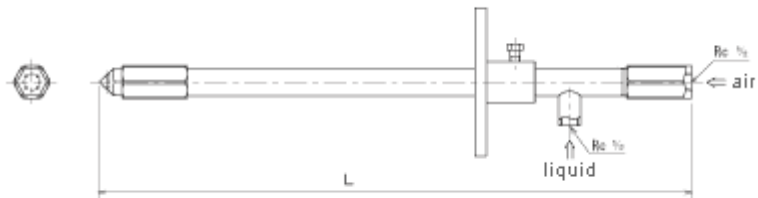

NPT thread is also available.

### Elbow type



NPT thread is also available.

---

## Model and Model Number representing

KAM

27×8-70

Model number

